


Aluminium Hinged Window Screen Commercial

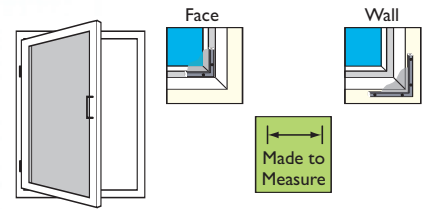

Features

Face fits inside or outside to existing frame, or to the wall outside the reveal.
 If your window opens out the screen will be fitted on the inside and vice versa.
 Hinged screen - held in place by hinges and magnetic catches.
 Fixed screen - screw fitted to existing frame or wall.
 Powder coated aluminium frame in white or brown.
 Grey insect mesh as standard.
 A midbar may be used to provide additional support for larger screens.

Benefits

Robust profile with mitred corners, makes this screen suitable for using with side hinges.
 Easy access to open and close windows.
 Easily removed for cleaning.
 Made-to-measure screen (supplied ready for you to fit).

Measuring

Measure the width and height of the aperture, plus any bevelled edges on the window frame.
 Add 28mm of flat surface on each side (for the screen frame to rest against). If you are short of flat surface, you can have as little as 10mm, but the frame will overlap some of the aperture.
 Any locating wedge for a cockspur handle must be included in the aperture measurement and there must be at least 28mm of flat surface beyond it.
 Made-to-measure – we will make to the exact size you tell us.

Width: Aperture (and bevelled edges) + 56mm of flat surface = ____ mm
 Height: Aperture (and bevelled edges) + 56mm of flat surface = ____ mm

Additionally:
 Ensure you have an additional 13 mm of flat surface to fit hinges and 13mm to fit magnetic catch - do not include these amounts in the manufacturing measurements you give us.

Do you need to build a sub frame?
 If the window handle extends beyond the flat surface you will need to build a sub frame around the window to bring the screen away from the window handle when it is closed.

