


Roller Door Screens

Slim Line Range

Side Mounted - Pull Across

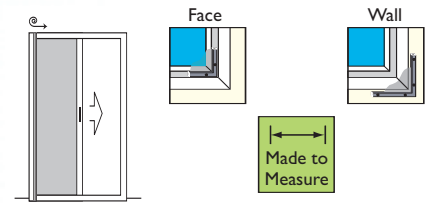

Features

Face fits, inside or outside, to door frame, sub frame, or the wall outside the reveal. If your door opens out the screen will be fitted on the inside and vice versa.

The aluminium powder coated cartridge fits down one side of the aperture and sections of track fit across the top and bottom.

The mesh screen is extended using a handle on the edge of the mesh, and releases easily to roll back smoothly into the cartridge when not needed.

When the mesh is extended across it is held in place by a magnetic catch which fits on the opposite side to the cartridge.

For wider openings two screens can be used, meeting in the middle and held in place by a magnetic strip.

Cartridge and side tracks come in white or brown.

Maximum size for single roller 1500mm wide x 2500mm high,

for double roller 2500mm wide x 2500mm high.

Fitted with Décor mesh - grey and white vertical patterned - as standard.

Benefits

Neat fly screen retracts discreetly into its cartridge when not in use.

Slim line top and bottom tracks.

Ideal for use in the office or at home.

Easy access to open and close doors.

Made-to-measure (supplied ready for you to fit).



Measuring for Face Fit

The height of the cartridge is the critical measurement – it cannot be changed after it has been made.

Measure the height of the aperture, plus any bevelled edges on the door frame.

Add 25mm of flat surface at the top and bottom to fit the tracks.

Measure the width of the aperture, plus any bevelled edges on the door frame.

Add 50mm of flat surface on one side for the cartridge to fit to (you can have as little as 10mm but the cartridge will overlap some of the aperture), and 10mm of flat surface on the opposite side to provide a seal when the screen is extended.

If fitting to the wall outside the reveal, we suggest you add an additional 20mm of flat surface all round, to avoid fixing too close to the edge of the reveal.

Width: Aperture + 60mm of flat surface = ____ mm

Height: Aperture + 50mm of flat surface = ____ mm

Additionally:

Ensure you have an additional 20mm of flat surface to fit the magnetic catch – do not include this amount in the manufacturing measurements you give us.

The Roller Door Screen uses a section of track along the bottom, which needs to be face fitted against the threshold. It may be necessary to raise the threshold or create one to accommodate the bottom track.

