




Aluminium Hinged Window Screen Commercial

[Go to web page](#)

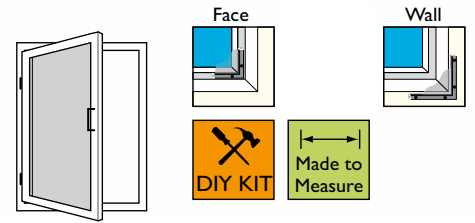

Features

- Face fits inside or outside to existing frame, or to the wall outside the reveal.
- If your window opens out the screen will be fitted on the inside and vice versa.
- Hinged screen - held in place by hinges and magnetic catches.
- Fixed screen - screw fitted to existing frame or wall.
- Frame in white powder coated aluminium with brush pile seal.
- Grey insect mesh as standard.
- A midbar may be used to provide additional support for larger screens.

Benefits

- Robust profile with mitred corners, makes this screen suitable for using with side hinges.
- Suitable for commercial premises.
- Easy access to open and close windows.
- Easily removed for cleaning.
- Made-to-measure screen (supplied ready for you to fit).

Measuring

Measure the width and height of the aperture, plus any bevelled edges on the window frame. Allow space for window handles and fittings which need to fit within the frame of the screen. Add 28mm of flat surface on each side (for the screen frame to rest against). If you are short of flat surface, you can have as little as 10mm, but the frame will overlap some of the aperture. These will be the outer dimension of the screen frame. Made-to-measure – we will make to the exact size you give us.

Width: Aperture (and bevelled edges) + 56mm of flat surface = _____ mm

Height: Aperture (and bevelled edges) + 56mm of flat surface = _____ mm

Additionally:

Ensure you have an additional 17mm of flat surface to fit hinges and 13mm to fit the magnetic catch - do not include these amounts in the manufacturing measurements you give us.

Do you need to build a sub frame?

If the window handle extends beyond the flat surface you will need to build a sub frame around the window to bring the screen away from the window handle when it is closed.

