




Chain Screen

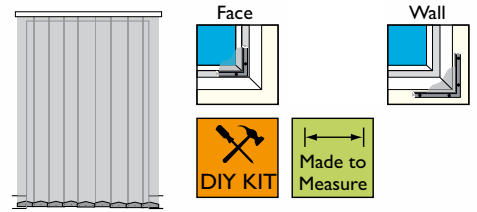


[Go to web page](#)

Features

- Anodised Aluminium chain link that is suspended from a removable aluminium rail.
- Fits inside or outside. If your door opens out the screen will be fitted on the inside and vice versa.
- Face fits to existing door frame or to wall outside the reveal.
- Silver coloured as standard, other colours available on request.

Benefits

- Allows easy access through doorways.
- Ideal for commercial and industrial premises.
- Available as made-to-measure (supplied ready for you to fit) or as a DIY Kit (for you to make and fit).
- High quality anodisation resists the effects of rubbing, sunlight, seawater and acid products.
- Easily cleaned using a mild detergent.

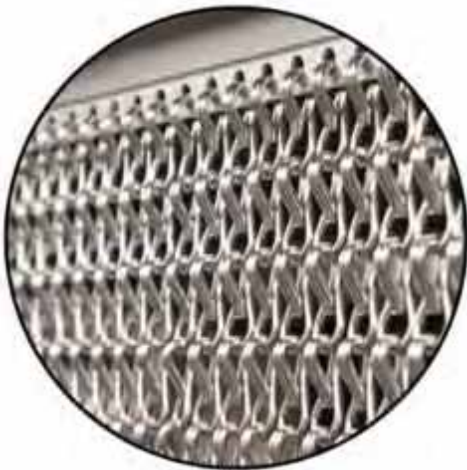

Measuring for Face Fitting

The chain screen will face fit on to your existing door frame.

Width: Measure the width of the aperture and add minimum 10mm of flat surface on each side to overlap the doorway.

$$\text{Aperture} + 20\text{mm} = \text{_____mm}$$

Height: Measure the height from the doorsill to the top of the aperture and add 30mm of flat surface to allow space to fit the brackets. Deduct 10mm from total measurement to allow for clearance above floor or threshold.

$$\text{Aperture} + 30\text{mm} - 10\text{mm} = \text{_____mm}$$

